

BC 390/2 AC





PURCHASE CODES

| | |
|---|------------------------------------|
| BC 390/2 single phase without thermo switch | 3RBC390/2 |
| BC 390/2 single phase with thermo switch | 3RBC390/2T247 3RBC390/2T260 |
| BC 390/2 three phase without thermo switch | 3RBC390/238 |
| BC 390/2 three phase with thermo switch | 3RBC390/238T247 3RBC390/238T260 |


SPARE PARTS

| | |
|--------------------------------------|-----------------|
| Cooling element | 1RO03383 |
| Frame | 3CNBC390/2M/T.1 |
| Electric fan for BC 250 single phase | 1VNEASS400 |
| Electric fan for BC 250 three phase | 1VNELCO43238DV2 |
| Thermo-switch 47-36 IP 65 | 1TRM 47-36 |
| Thermo-switch 60-49 IP 65 | 1TRM 60-49 |

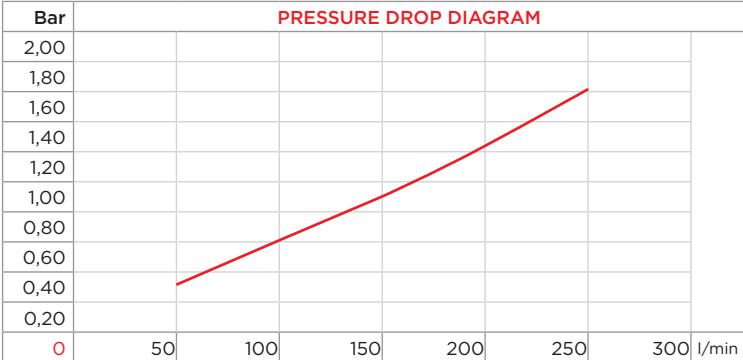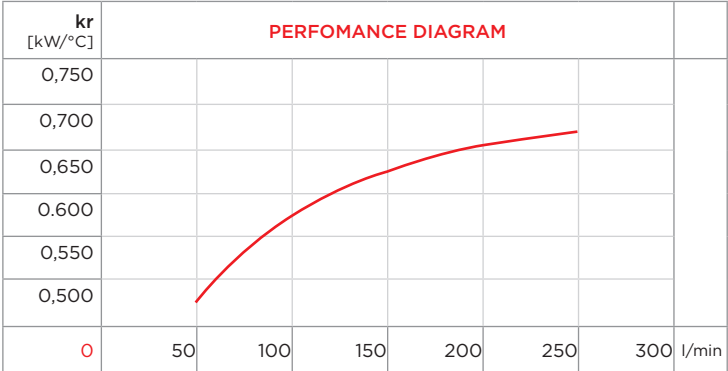


CORRECTION FACTOR

| | | | | | | | |
|-----|-----|----|-----|-----|-----|-----|-----|
| cSt | 22 | 30 | 46 | 68 | 100 | 150 | 220 |
| f | 0,6 | 1 | 1,5 | 2,3 | 3,5 | 5 | 7 |

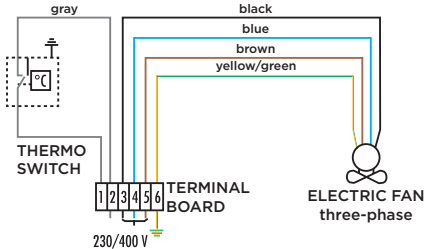

- Dimensions and technical characteristics are not binding

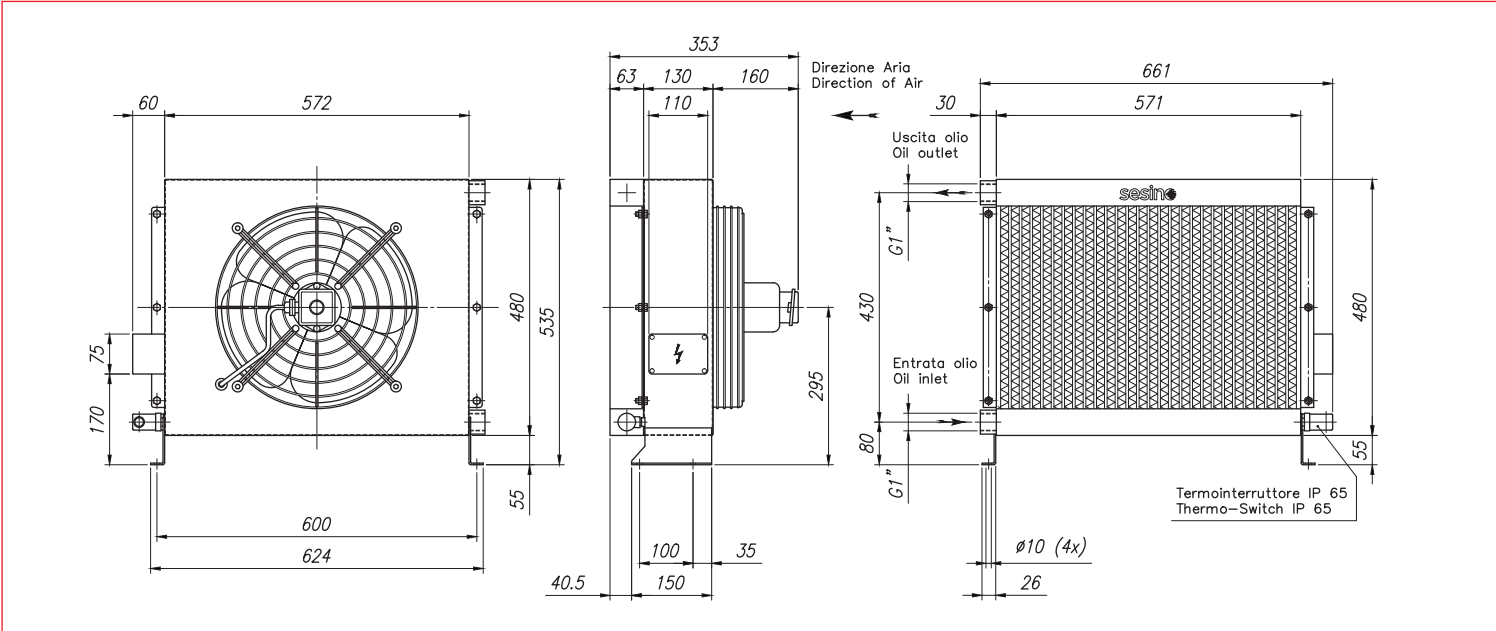

| OIL FLOW | VOLTAGE | FREQUENCY | POWER | CURRENT | AIR FLOW | PROTECTION | NOISE LEVEL | WEIGHT | ø FAN |
|----------|-------------|-----------|---------|-----------|----------|------------|-------------|--------|-------|
| l/min | V | hz | W | A | m³/h | IP | dB(A) | kg | mm |
| 30-250 | Δ 230 Y 400 | 50 | 110/180 | 0,57/0,33 | 2.750 | 55 | 72 | 31 | 400 |
| 30-250 | Δ 265 Y 460 | 60 | 145/260 | 0,68/0,39 | 3.300 | 55 | 73 | 31 | 400 |