


# ELECTRIC ON-OFF CONTROL

**TYPE OF CIRCUITS AVAILABLE**


<b>AED</b>	<b>DOUBLE ACTING</b>
<b>EED</b>	<b>SINGLE ACTING</b>
<b>CED</b>	<b>A e B in T</b>

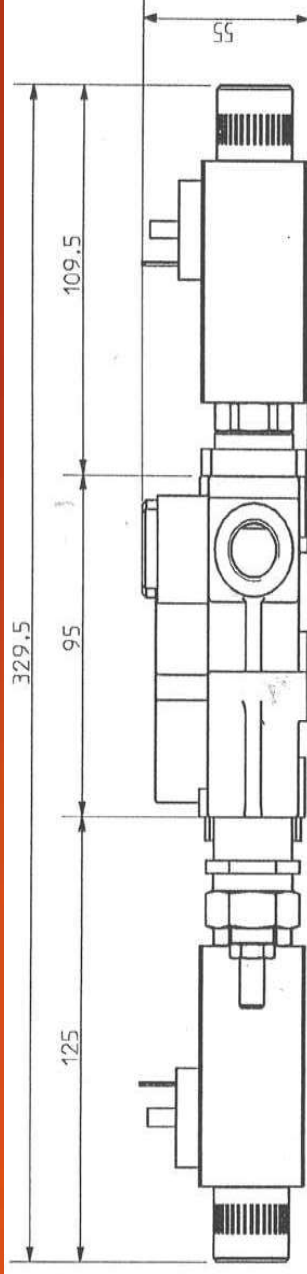

# FIXING HOSE-A-

N°	Sect	-A-
1		81
2		117
3		153
4		189
5		225
6		261

Ports	Thread	Option
P-A-B	3/8 BSP	1/2 BSP
T	1/2 BSP	

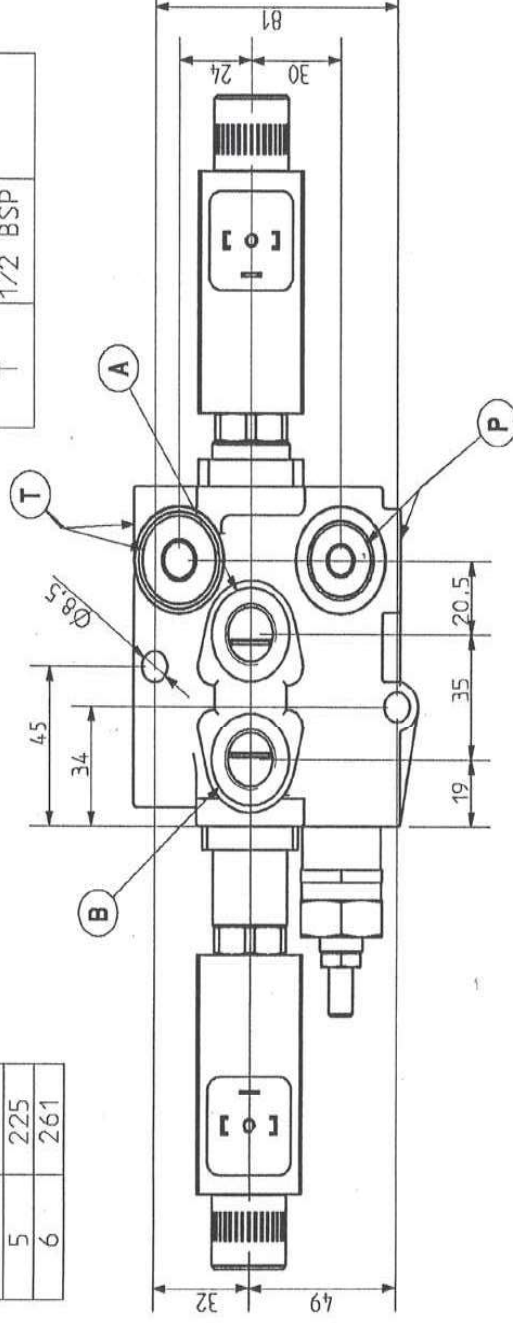

\* Standards

Max Flow	Exc Press	Solenoids	Watts	Ampere	Connect
55	150	12 DC	40*	3.33	DIN 43650
45	180	24 DC	40*	1.66	DIN 43650
35	210		50	4.16	
25	250		50	2.08	

Queste prestazioni richiedono un  
filtraggio di 20 Micron o inferiore  
.....  
For this performance it's needed an  
filter cartridge 20 Micron or better