


MB25/1

MONOBLOCK VALVES


MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 2,3
CONFIGURATION	PARALLEL

STANDARD CONFIGURATION

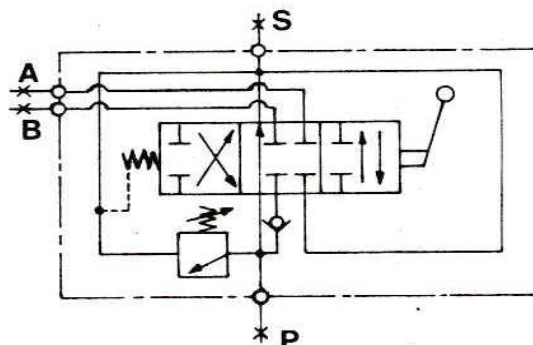


STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

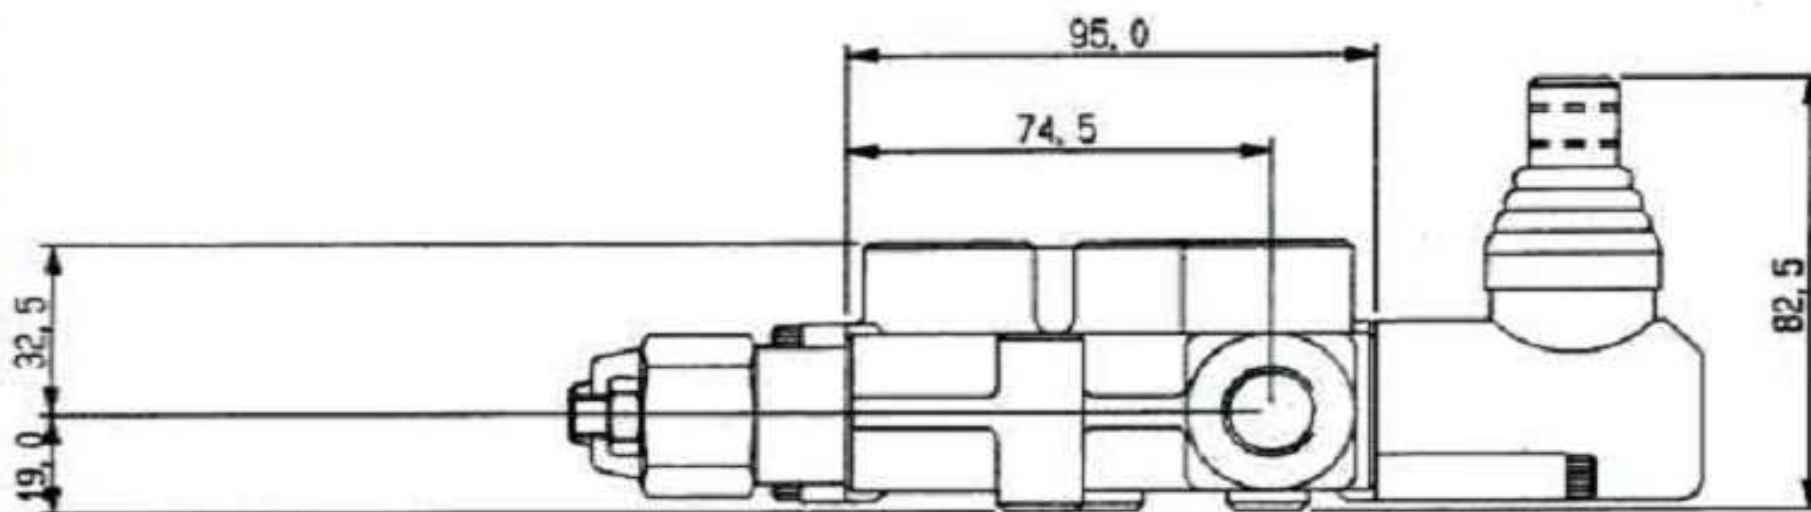

MB25/1

MONOBLOCK VALVES

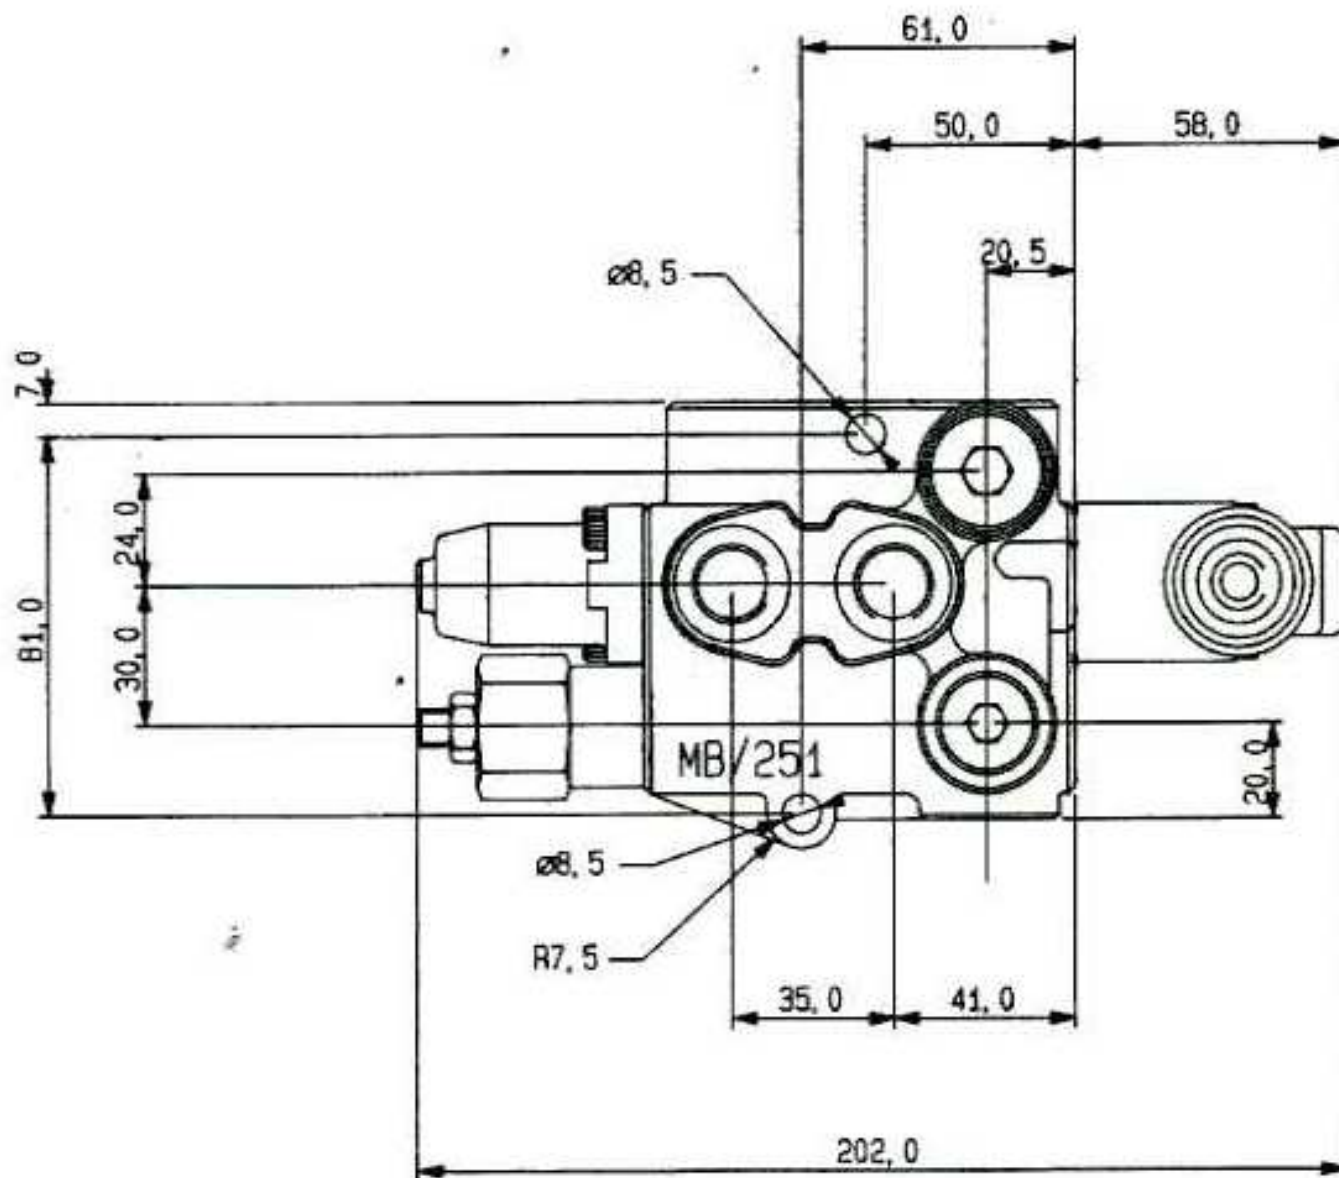

**STANDARD
LEVER
MB/25**

